



Project _____


Type _____

Notes _____

PERFORMANCE AT 4000K

NOMINAL LUMEN OUTPUT	INPUT WATTS*	EFFICACY
900 lm	10.35 W	87 lm/W
1000 lm	11.63 W	86 lm/W
1200 lm	14.25 W	84 lm/W
1600 lm	19.63 W	82 lm/W

* Based on a 1'x1' luminaire using one driver
Please consult factory for custom lumen output and wattage.

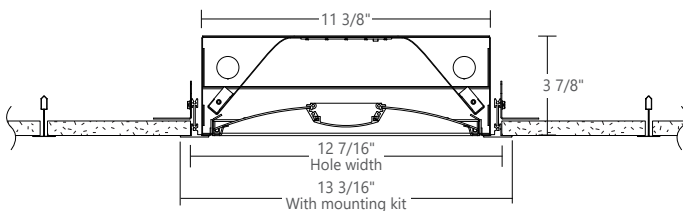

SECTION VIEW

**Ordering Guide**

PRODUCT ID	SIZE	NOMINAL LUMENS	CRI	COLOR TEMP. (choose one)	SHIELDING	FINISH
DAYFLED DAY flat LED	11 1'X1'	600 600 lm - Min	80 80 CRI	27 2700 K	SO spotless lens	W white
DAYCLED DAY curve LED*		1500 1500 lm - Max at 90 CRI	90 90 CRI*	30 3000 K		BLK black
		1700 1700 lm - Max at 80 CRI		35 3500 K		C custom
				40 4000 K		
				B30 3000 K - BIOS*		
				B35 3500 K - BIOS*		
				B40 4000 K - BIOS*		
*DLC qualified		Outputs between listed min and max are available. Consult factory for outputs outside of the listed range. Consult factory for max output with BIOS	*Not available with BIOS.	Consult Axitune technical sheet for more information of color technology. *Consult BIOS guide for more information on BIOS technology		

VOLTAGE	DRIVER	CIRCUITS	MOUNTING	BATTERY (OPTIONAL)
120 120 V	DP dimming (0-10V) 1%	1 1 circuit	DF drywall flange	BR(#) Remote Battery Pack only
277 277 V	LT Lutron	+E(#) emergency circuit*		
347 347 V	BI bi-level dimming	+NL(#) night light circuit*		
UNV universal	O(#) other**	+GTD(#) generator transfer device*		
DC low voltage*	DPB(STC) dimming (0-10V) 1% with BIOS*			
	DPB(DYN) Bio-dimming™ 100%-81% with BIOS*			
	TW(#) tunable white drivers*			
	POE(#) POE drivers*			
* Only available with POE drivers.		* See page 2 to specify system ** Please consult factory; see page 2	*Specify quantity	
			Remote Battery Pack only Not available with 347V Please consult factory	

OTHER (OPTIONAL)	IC CONTROLS (OPTIONAL)	CUSTOM (OPTIONAL)
FW flex whip (6' std)*	DS(#) daylight sensor	C custom
CP Chicago plenum	OS(#) occupancy sensor	
	DOS(#) daylight & occupancy sensor	
	WC(#) wireless control dimming	
* Other lengths available; please consult factory.	Specify quantity. Requires 1.5" blank. See integrated controls guide for more details. Consult factory for Tunable White. Not available with DPB (DYN) driver for BIOS with Dynamic Spectrum.	Please specify

SPECIFY DRIVER NAME (if needed)

SPECIFY BATTERY NAME (if needed)

● ELECTRICAL

Lutron driver	LDE1 - Hi-lume 1% EcoSystem with Soft-on, Fade-to-Black
Other drivers**	DALI - Digital Addressable Lighting Interface DMX - Digital Multiplex Xitanium SR - For wireless sensor
BIOS DPB drivers*	STC - BIOS control 0-10V with static spectrum and BIOS SkyBlue enabled from 100% to 1%. DYN - BIOS control 0-10V with dynamic spectrum and BIOS SkyBlue® with Bio-Dimming™, which changes spectral qualities by removing the SkyBlue component when dimming from 100% to 81%, while light output remains relatively constant; bio-dimming reduces CCT to 2700K. Dimming from 80% to 1% will then reduce light output.
Tunable White TW drivers*	DALIDT6 - DALI Type 6 (Two DALI Addresses) DALIDT8 - DALI Type 8 (One DALI Address) DPTW - two channel 0-10V dimming: one channel for brightness, one channel for CCT. LDTW - Lutron DALI Type 8 (One DALI address) Tunable White series
Power over Ethernet POE drivers*	MOLEX IGOR SMARTENGINE O - Other (Consult factory)
Emergency	Remote emergency battery pack or emergency circuit optional.
Input Voltage	120V, 277V, 347V, UNV, DC.
Flex Whip	Shipped in a separate box for contractors to install

*Choose driver from available options.

i Incorporating these components may have limitations or affect the length of the luminaire. Please contact factory for more details.

● SPECIFICATIONS

Housing	Die formed cold rolled sheet steel (20 gauge)
Central Lens Housing	Extruded aluminum (0.060" nominal)
Lens	Spotless acrylic lens
Side lens	0.08" PMMA satin blend
Reflectors	Die formed cold rolled sheet steel (22 gauge)
Interior Brackets	Die formed cold rolled sheet steel (20 gauge)
Drywall Flange Kit	Extruded aluminum (0.060" nominal)

● APPROVALS

Certified to UL and CSA standards
Chicago Plenum Certified (CCEA)
Meets NYC requirements
Suitable for damp locations.
IC Rated (Insulated ceiling)



● WEIGHT

Standard	8 lbs / 3.6 kg
Drywall with Kit	9 lbs / 4.1 kg

● LED SYSTEM

CRI	Minimum 80 or 90 color rendering index.
CRI BIOS	Minimum 80 color rendering index with R9>75 for all CCTs.
CCT Single Color	Choice of 2700K, 3000K, 3500K and 4000K color temperature with a great color consistency (within 3-step MacAdam ellipse). Both within fixture and fixture to fixture.
CCT BIOS	BIOS Static (STC) Choice of 3000K, 3500K and 4000K. BIOS SkyBlue® Dynamic (DYN) Choice of 3000K, 3500K, and 4000K with Bio-Dimming™ BIOS Tunable White (BTW) Choice of 4000-2700K and 3500-2700K; does not use a bio-dimmer, it uses TW drivers, which allow independent control of CCT and intensity; e.g., BTW4027 provides combined SkyBlue + white light at 4000K, SkyBlue is removed at 2700K. Light output can be adjusted for each CCT. Consult BIOS guide for more information on BIOS technology.
CCT Axitune Systems	Consult Axitune technical sheet for more information on color technology.
LED life	Minimum 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements.
Thermal Management	Aluminum housing acting as the heat sink to maximize life.
Environment	Dry and damp rated for indoor use only in operating ambient temperatures of 0-40°C (32-104°F).

● FINISH

Highly reflective, matte powder coat white paint for high efficiency. Matte texture to diffuse glare and lamp image on the surface within the optical chamber exterior. Custom finishes are also available.


● WARRANTY

Limited 5-year warranty is available. Warranty is valid provided luminaires are installed and used according to specifications. For full terms and conditions, please consult warranty section at axislighting.com.

● STANDARD AND END MOUNT POWER FEED


Knockouts for BX cable connection are provided both on the top and on the ends of the luminaire. This allows for an end mount power feed solution if it is required.

(BX CABLE BY OTHER)


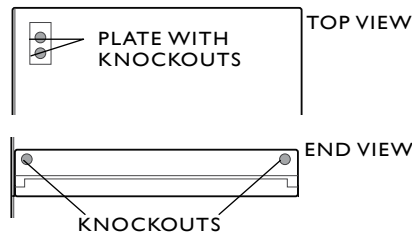


● CEILING SYSTEM

T-BAR STYLE MOUNTING

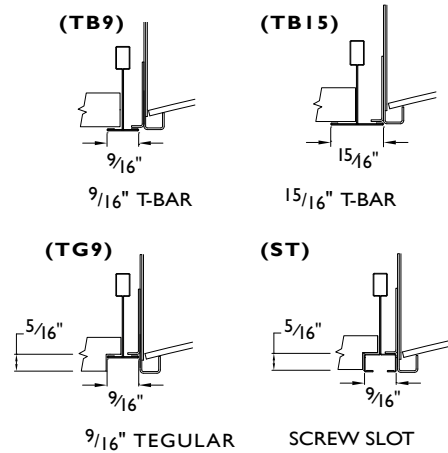

DRYWALL WITH FLANGE KIT (DF)

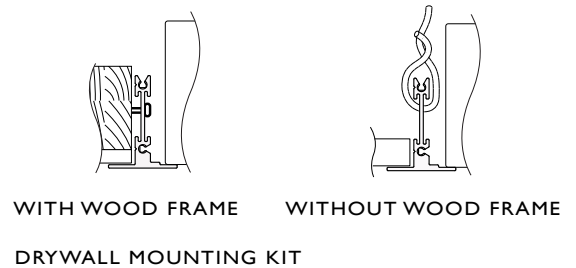

FIXTURE DIMENSIONS
11 3/8" / 11 3/8"
CUT HOLE DIMENSIONS
12 7/16" / 12 7/16"


i Installation sheets for all mountings options are available at: www.axislighting.com

● PHOTOMETRIC DATA

LED



PHOTOMETRIC CURVE



Luminaire Lumens: 900 lm
Input Watts: 10.35 W
Efficacy: 87 lm/W
 IES FILE: DAYLED-11-900-80-40-SO.ies

TESTED ACCORDING TO IES LM-79-2008

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles					Zonal Lumens
	0	22.5	45	67.5	90	
0	371	371	371	371	371	
10	363	364	368	370	372	17
20	331	335	348	362	367	33
30	285	294	315	331	337	43
40	231	241	258	268	271	45
50	171	180	187	186	186	38
60	114	118	118	111	108	27
70	64	63	58	53	51	15
80	24	22	20	19	20	6
90	0	0	0	0	0	

LUMINANCE DATA (cd/m²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	2775	3082	3171
55	2412	2569	2459
65	2032	1968	1776
75	1607	1362	1293
85	934	726	622

COEFFICIENTS OF UTILIZATION (%)


Ceiling	80				70				50			
	70	50	30	10	70	50	30	10	50	30	10	10
Wall	70	50	30	10	70	50	30	10	50	30	10	10
0	119	119	119	119	116	116	116	116	111	111	111	111
1	110	106	102	97	108	104	100	96	99	97	93	93
2	101	94	87	80	99	92	86	79	88	83	77	77
3	93	83	76	67	90	81	75	66	79	73	66	66
4	85	74	66	57	83	73	65	57	70	64	56	56
5	79	67	58	49	77	66	58	49	64	57	49	49
6	73	60	52	43	71	59	51	43	58	51	43	43
7	68	55	47	38	66	54	46	38	53	45	38	38
8	63	50	42	34	62	50	42	34	48	41	34	34
9	59	46	38	31	58	46	38	31	45	38	31	31
10	56	43	35	28	54	42	35	28	41	35	28	28

Based on floor reflectance of 20

LED



PHOTOMETRIC CURVE



Luminaire Lumens: 1000 lm
Input Watts: 11.63 W
Efficacy: 86 lm/W
 IES FILE: DAYLED-11-1000-80-40-SO.ies

TESTED ACCORDING TO IES LM-79-2008

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles					Zonal Lumens
	0	22.5	45	67.5	90	
0	413	413	413	413	413	
10	403	404	408	412	414	19
20	367	372	387	402	407	36
30	317	326	350	367	374	48
40	256	267	287	297	301	50
50	190	200	208	207	207	43
60	127	131	131	123	120	30
70	71	70	65	59	57	17
80	27	25	23	22	23	6
90	0	0	0	0	0	

LUMINANCE DATA (cd/m²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	3083	3424	3523
55	2680	2855	2732
65	2258	2187	1973
75	1786	1514	1436
85	1037	807	692

COEFFICIENTS OF UTILIZATION (%)

Ceiling	80				70				50			
	70	50	30	10	70	50	30	10	50	30	10	10
Wall	70	50	30	10	70	50	30	10	50	30	10	10
0	119	119	119	119	116	116	116	116	111	111	111	111
1	110	106	102	97	108	104	100	96	99	97	93	93
2	101	94	87	80	99	92	86	79	88	83	77	77
3	93	83	76	67	90	81	75	66	79	73	66	66
4	85	74	66	57	83	73	65	57	70	64	56	56
5	79	67	58	49	77	66	58	49	64	57	49	49
6	73	60	52	43	71	59	51	43	58	51	43	43
7	68	55	47	38	66	54	46	38	53	45	38	38
8	63	50	42	34	62	50	42	34	48	41	34	34
9	59	46	38	31	58	46	38	31	45	38	31	31
10	56	43	35	28	54	42	35	28	41	35	28	28

Based on floor reflectance of 20


i All IES files are available for download at: www.axislighting.com

● PHOTOMETRIC DATA

LED



PHOTOMETRIC CURVE



Luminaire Lumens: 1200 lm
Input Watts: 14.25 W
Efficacy: 84 lm/W
IES FILE: DAYLED-I I-1200-80-40-SO.ies

TESTED ACCORDING TO IES LM-79-2008

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles					Zonal Lumens
	0	22.5	45	67.5	90	
0	495	495	495	495	495	
10	484	485	490	494	496	23
20	441	447	464	483	489	44
30	380	391	420	441	449	57
40	307	321	344	357	362	60
50	228	240	249	248	248	51
60	152	157	157	148	144	36
70	85	84	78	70	68	20
80	32	30	27	26	27	8
90	0	0	0	0	0	

LUMINANCE DATA (cd/m²)


Vertical Angle	Horizontal Angles		
	0	45	90
45	3700	4109	4228
55	3216	3426	3279
65	2710	2624	2368
75	2143	1817	1723
85	1245	968	830

COEFFICIENTS OF UTILIZATION (%)


Ceiling	80				70				50			
	70	50	30	10	70	50	30	10	50	30	10	
Wall	70	50	30	10	70	50	30	10	50	30	10	
0	119	119	119	119	116	116	116	116	111	111	111	
1	110	106	102	97	108	104	100	96	99	97	93	
2	101	94	87	80	99	92	86	79	88	83	77	
3	93	83	76	67	90	81	75	66	79	73	66	
4	85	74	66	57	83	73	65	57	70	64	56	
5	79	67	58	49	77	66	58	49	64	57	49	
6	73	60	52	43	71	59	51	43	58	51	43	
7	68	55	47	38	66	54	46	38	53	45	38	
8	63	50	42	34	62	50	42	34	48	41	34	
9	59	46	38	31	58	46	38	31	45	38	31	
10	56	43	35	28	54	42	35	28	41	35	28	

Based on floor reflectance of 20

LED



PHOTOMETRIC CURVE



Luminaire Lumens: 1600 lm
Input Watts: 19.63 W
Efficacy: 82 lm/W
IES FILE: DAYLED-I I-1600-80-40-SO.ies

TESTED ACCORDING TO IES LM-79-2008

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles					Zonal Lumens
	0	22.5	45	67.5	90	
0	660	660	660	660	660	
10	645	647	654	658	662	31
20	588	596	619	644	652	58
30	507	522	560	588	599	76
40	410	428	459	476	482	80
50	305	319	333	331	331	68
60	202	209	209	198	193	48
70	114	112	104	94	91	27
80	43	40	36	35	36	10
90	0	0	0	0	0	

LUMINANCE DATA (cd/m²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	4933	5478	5638
55	4288	4568	4381
65	3612	3499	3157
75	2857	2422	2298
85	1660	1291	1107

COEFFICIENTS OF UTILIZATION (%)

Ceiling	80				70				50			
Wall	70	50	30	10	70	50	30	10	50	30	10	
0	119	119	119	119	116	116	116	116	111	111	111	
1	110	106	102	97	108	104	100	96	99	97	93	
2	101	94	87	80	99	92	86	79	88	83	77	
3	93	83	76	67	90	81	75	66	79	73	66	
4	85	74	66	57	83	73	65	57	70	64	56	
5	79	67	58	49	77	66	58	49	64	57	49	
6	73	60	52	43	71	59	51	43	58	51	43	
7	68	55	47	38	66	54	46	38	53	45	38	
8	63	50	42	34	62	50	42	34	48	41	34	
9	59	46	38	31	58	46	38	31	45	38	31	
10	56	43	35	28	54	42	35	28	41	35	28	

Based on floor reflectance of 20

i All IES files are available for download at: www.axislighting.com