


# Sketch 2

## RING SURFACE - RGB+W

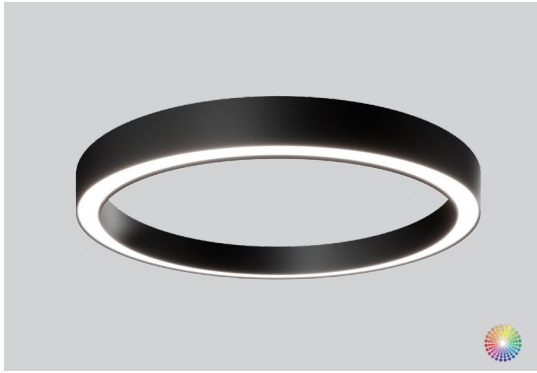

Project \_\_\_\_\_


Type \_\_\_\_\_

Notes \_\_\_\_\_

### ● PERFORMANCE PER LINEAR FOOT AT 3500K WHITE

|          | NOMINAL LUMEN OUTPUT DIRECT | INPUT WATTS* | EFFICACY  |
|----------|-----------------------------|--------------|-----------|
| Sketch 2 | 900lm/ft                    | 13.11 W/ft   | 68.7 lm/W |

Please consult factory for other lumen output and wattage.



## Ordering Guide

| SK2S                                                                         |                                |                    |              |                            |               |
|------------------------------------------------------------------------------|--------------------------------|--------------------|--------------|----------------------------|---------------|
| PRODUCT ID                                                                   |                                | PATTERNS AND FORMS |              | CORRESPONDING TOTAL LENGTH |               |
| SK2S                                                                         | Sketch 2 Ring Surface<br>RGB+W | D(36")             | diameter 36" | AL(9' 5 2/16")             | 900 900 lm/ft |
|                                                                              |                                | D(48")             | diameter 48" | AL(13' 6 13/16")           |               |
|                                                                              |                                | D(60")             | diameter 60" | AL(16' 8 8/16")            |               |
|                                                                              |                                | D(72")             | diameter 72" | AL(19' 10 3/16")           |               |
|                                                                              |                                | D(84")             | diameter 84" | AL(22' 11 14/16")          |               |
|                                                                              |                                | D(96")             | diameter 96" | AL(25' 1 9/16")            |               |
|                                                                              |                                |                    |              |                            |               |
| See above for available diameter options. See page 2 for ordering examples.. |                                |                    |              |                            |               |

| CRI |                      | COLOUR TEMP.                 |                              | SHIELDING |               | FINISH |                | VOLTAGE   |      | DRIVER  |                     |
|-----|----------------------|------------------------------|------------------------------|-----------|---------------|--------|----------------|-----------|------|---------|---------------------|
| 90  | high efficacy 90 CRI | CTRGBW30                     | RGB+30K White - Color Tuning | SO        | spotless lens | AP     | aluminum paint | 120       | 120V | CT(DMX) | color tuning driver |
|     | CTRGBW35             | RGB+35K White - Color Tuning | W                            |           |               | white  | 277            | 277V      |      |         |                     |
|     | CTRGBW40             | RGB+40K White - Color Tuning | BLK                          |           |               | black  | UNV            | universal |      |         |                     |
|     |                      |                              |                              |           |               | C      | custom         |           |      |         |                     |


| CIRCUITS           |                                  | MOUNTING         |                                                  | CUSTOM (OPT.)  |        |
|--------------------|----------------------------------|------------------|--------------------------------------------------|----------------|--------|
| 1<br>+E(#)         | 1 circuit<br>emergency circuit * | S<br>SC          | surface drywall ceiling<br>surface solid ceiling | C              | custom |
| * Specify quantity |                                  | Specify quantity |                                                  | Please specify |        |

## How to Specify Standard Rings

**Note:** The center line indicates the diameter at the center of the curve. Regardless to the mounting style, the center line remains the same. This is the dimension that should be used when planning a layout.

### Defining Rings - Circular shape

SK2S-D(36")-AL(9' 5 3/32")-500-90-CTRGBW35-SO-W-120-CT(DMX)-1-S

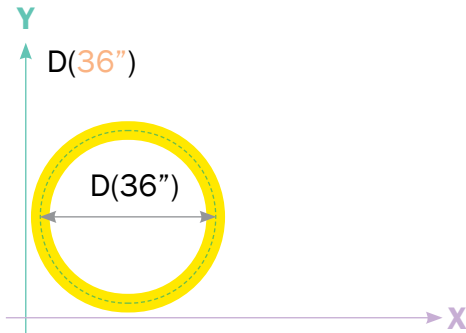

**Note:** The number will define the diameter of the circle.

### CONSTRUCTION

|                                |                                    |
|--------------------------------|------------------------------------|
| <b>Housing</b>                 | Extruded aluminum (0.075" nominal) |
| <b>Interior reflectors</b>     | Sheet aluminum (20 gauge)          |
| <b>Mounting brkts.</b>         | Die cast aluminum (0.10" nominal)  |
| <b>Joining brackets.</b>       | Die cast aluminum (0.10" nominal)  |
| <b>Incap &amp; Cross Brkt.</b> | Die cast aluminum (0.10" nominal)  |

### SHEILDING

|                      |                        |
|----------------------|------------------------|
| <b>Spotless Lens</b> | Acrylic (0.06" thick). |
|----------------------|------------------------|

### FINISH

Highly reflective, white powder coat finish paint for high efficiency. Matte texture to diffuse glare and lamp image on the surface within the optical chamber exterior. Custom finishes are also available.

### WEIGHT

Approximately 1.75lbs/ft = 0.8kg/ft (linear)

### DMX CONNECTION

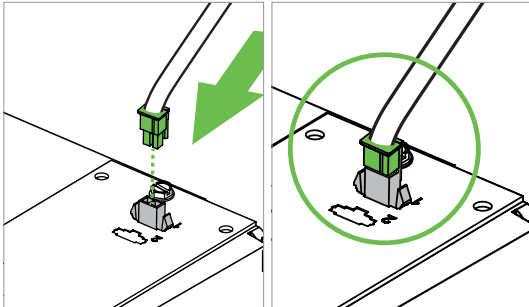


Illustration shows DMX cables that run to luminaire using MOLEX® Quick Connect plug for easy wiring.

Appropriate cables include (but are not limited to) the following:

| PLENUM RATED       | NON-PLENUM RATED  |
|--------------------|-------------------|
| Belden 82842       | Belden 9842       |
| Belden 89842       | Liberty 24-2P-485 |
| Liberty 24-1P-P485 |                   |
| Liberty 24-2P-P485 |                   |

The maximum recommended run length between a single fixture and the DMX controller or splitter where the signal originates (or is boosted in the case of a splitter) is 1000 ft including any cable length between a ceiling canopy and the fixture.

The maximum recommended bus run length between two daisy-chained DMX controlled fixtures is 300 ft.

### ELECTRICAL

|                               |                             |
|-------------------------------|-----------------------------|
| <b>Color Tuning CT driver</b> | DMX - Standard              |
| <b>Emergency</b>              | Emergency circuit optional. |
| <b>Input Voltage</b>          | 120V, 277V, UNV.            |

**i** Incorporating these components may have limitations or affect the length of the luminaire. Please contact factory for more details.

### LED SYSTEM

|                            |                                                                                                                                                                |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CRI</b>                 | High efficacy 90 color rendering index.                                                                                                                        |
| <b>CRI Color Tuning</b>    | 90 CRI for CTRGBW.<br><b>Note: RGB+W allows you to select the 'white point' (CCT) + CRI, delivering a more flexible and powerful white than standard RGBW.</b> |
| <b>CCT Color Tuning</b>    | 30 (3000K)<br>35 (3500K)<br>40 (4000K)                                                                                                                         |
| <b>CCT Axitune Systems</b> | <a href="#">Consult Axitune technical sheet for more information on color technology.</a>                                                                      |
| <b>LED life</b>            | Minimum 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements.                                  |
| <b>Thermal Management</b>  | Aluminum housing acting as the heat sink to maximize life.                                                                                                     |
| <b>Environment</b>         | Dry and damp rated in operating ambient temperatures of 0-40°C (32-104°F).                                                                                     |


### APPROVALS

Certified to CSA standards   
Meets NYC requirements  
Suitable for damp locations, indoor only.

### WARRANTY

Axis Lighting will warrant defective LEDs, boards, and drivers for 5 years from date of purchase. Warranty is valid if luminaire is installed and used according to specifications. If defective, Axis will send replacement boards or drivers at no cost along with detailed replacement instructions and instructions on how to return defective components to Axis.

DMX INSTALLATION EXAMPLE

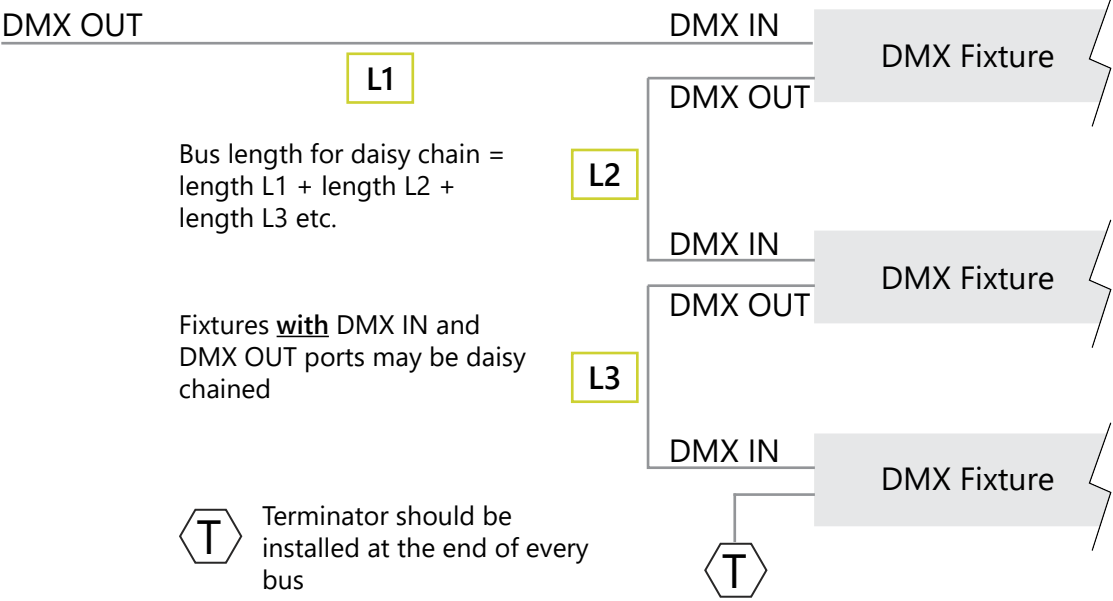

### ● WHAT IS DMX512 AND RDM

**DMX512A** (Digital Multiplex 512) is a communication standard (based on EIA-485/RS-485) for digital communication networks, typically used in stage lighting and control, but also in other various lighting applications.

DMX drivers are installed in DMX-enabled luminaires and programmed to specific DMX addresses to properly zone and control your fixtures.

**RDM** (Remote Device Management) is a protocol enhancement to DMX512, which allows a commissioner to remotely program multiple or individual DMX decoders to a unique DMX address. This is performed by simply connecting an RDM controller to the first DMX driver in a series run.

All DMX drivers/decoders Axis is using are RDM-compatible.

### ● DMX GLOSSARY


- **DMX Signal:** a repeating chain data output by a DMX controller, comprised of one 8-bit start code packet followed by 512 8-bit data packets. The first data packet is slot 1, the second slot 2, etc. The entire chain is repeated 44 times per second.
- **Device:** a DMX controller, a DMX-controlled fixture, or a DMX splitter DMX controller: a device where the DMX signal originates (sometimes called a "console")
- **DMX splitter:** a device that receives a DMX signal on its input, then duplicates that signal on its output(s). The input and output signals are usually isolated from each other, and the signal is "boosted" back to full voltage at each output (thereby compensating for voltage drop in long wiring runs). DMX splitters must be powered by their own mains or low-voltage supply.
- **DMX Fixture:** a light fixture that contains a DMX decoder that receives a DMX signal and changes its behavior based on those commands. Fixtures may be equipped with both "input" and "output" connections for the DMX signal.
- **DMX network:** ALL devices, cabling, and interconnections in a DMX controlled lighting system including the controller, fixtures, and splitters (if used)
- **Bus:** a continuous run of daisy-chained devices, originating at the output of a DMX controller or DMX splitter. No more than 32 devices should be connected to a single bus per the DMX-512A standard.
- **Terminator:** a 120Ω resistance installed at the end of a DMX bus to eliminate signal reflection back into the network
- **Channel:** a DMX-controlled element within a DMX fixture. For example an RGB fixture has three channels: one each for red, green, and blue.
- **Address:** the number of the first channel that a DMX fixture reads from the DMX signal

PHOTOMETRIC DATA

SO Spotless lens - Down

900 lm/ft

PHOTOMETRIC CURVE



Total Lumens: 3599 lm (for 4ft)

Input Watts: 52.42 W

Efficacy: 68.7 lm/W

IES FILE: SK2xx-LIN(4)-AL(4)-900-90-CTRGBW35-SO.ies

TESTED ACCORDING TO IES LM-79-2019

CANDELA DISTRIBUTION

| Vertical Angle | Horizontal Angles |      |      |      |      |
|----------------|-------------------|------|------|------|------|
|                | 0                 | 22.5 | 45   | 67.5 | 90   |
| 0              | 1498              | 1498 | 1498 | 1498 | 1498 |
| 5              | 1492              | 1486 | 1486 | 1480 | 1482 |
| 15             | 1423              | 1414 | 1407 | 1394 | 1395 |
| 25             | 1294              | 1274 | 1257 | 1239 | 1233 |
| 35             | 1109              | 1088 | 1067 | 1034 | 1026 |
| 45             | 901               | 878  | 849  | 800  | 782  |
| 55             | 679               | 657  | 606  | 552  | 540  |
| 65             | 452               | 424  | 371  | 323  | 311  |
| 75             | 235               | 199  | 158  | 124  | 117  |
| 85             | 58                | 31   | 15   | 11   | 11   |
| 90             | 4                 | 4    | 4    | 3    | 3    |

ZONAL LUMENS

| Zone  | Lumens |
|-------|--------|
| 0     |        |
| 0-10  | 141    |
| 10-20 | 397    |
| 20-30 | 583    |
| 30-40 | 670    |
| 40-50 | 656    |
| 50-60 | 551    |
| 60-70 | 381    |
| 70-80 | 186    |
| 80-90 | 36     |
| 90    |        |

LUMINANCE DATA (cd/m²)

| Vertical Angle | Horizontal Angles |       |       |
|----------------|-------------------|-------|-------|
|                | 0                 | 45    | 90    |
| 45             | 20788             | 19603 | 18053 |
| 55             | 19319             | 17241 | 15362 |
| 65             | 17438             | 14338 | 11996 |
| 75             | 14841             | 9933  | 7369  |
| 85             | 10917             | 2866  | 2130  |

All IES files are available for download at: [www.axislighting.com](http://www.axislighting.com)