
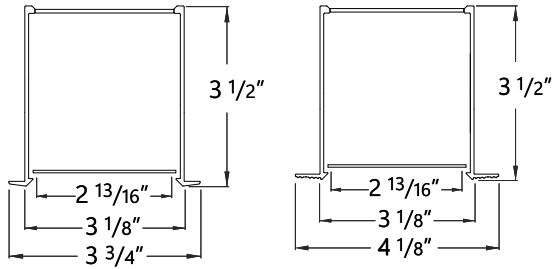


Sketch 3

RING RECESSED IP54

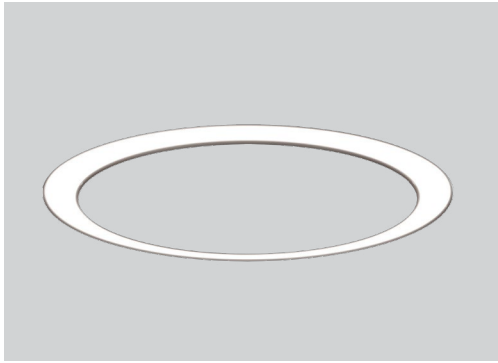

DF drywall flange shown

DS drywall spackle flange shown

Project _____

Type _____


Notes _____

● PERFORMANCE PER LINEAR FOOT AT 3500K, 90CRI

	NOMINAL LUMEN OUTPUT DIRECT	INPUT WATTS*	EFFICACY
Sketch 3	1300lm/ft	11.18 W/ft	116 lm/W

Please consult factory for other lumen output and wattage.

Ordering Guide



SK3RS					
PRODUCT ID		PATTERNS AND FORMS		CORRESPONDING TOTAL LENGTH	LUMENS/FT
SK3RS	Sketch 3 Ring Recessed Sealed - IP54 rated	D(24")	diameter 24"	AL(6' 3 6/16")	300 300 lm/ft - Low 1300 1300 lm/ft - High
		D(36")	diameter 36"	AL(9' 5 2/16")	
		D(48")	diameter 48"	AL(13' 6 13/16")	
		D(60")	diameter 60"	AL(16' 8 8/16")	
		D(72")	diameter 72"	AL(19' 10 3/16")	
		D(84")	diameter 84"	AL(22' 11 14/16")	
		D(96")	diameter 96"	AL(25'1 9/16")	
See above for available diameter options. See page 2 for ordering examples.				Outputs between listed are available. Consult factory for outputs outside of the listed range.	

CRI	COLOUR TEMP.		SHIELDING	FINISH		VOLTAGE	DRIVER	
90	high efficacy 90 CRI	27 2700 K 35 3500 K 30 3000 K 40 4000 K TW2750 2700-5000 K - Tunable White TW2765 2700-6500 K - Tunable White	SO spotless lens	AP aluminum paint W white BLK black C custom		120 120V 277 277V 347 347V* UNV universal DC low voltage**	DP dimming (0-10V) 1% - integral DALI2 driver DALI 2.0 Type 6 - integral LT(#) Lutron - remote* O(#) other - remote** O(DMX) other (Digital Multiplex)- remote** TW(#) tunable white drivers* POE(#) POE drivers - remote*	
						* Remote only. ** Only available with POE drivers.	* Specify system; see page 2. **Please consult factory; see page 2	


CIRCUITS		MOUNTING		REMOTE BATTERY (OPT.)	OTHER (OPT.)		CUSTOM (OPT.)
1	1 circuit	DF	drywall flange	BR(#) battery pack remote	FW	flex whip (6' std)*	C custom
2	2 circuits	DS	drywall spackle flange		CP	Chicago plenum	
+E(#)	emergency circuit *						
+GTD(#)	generator transfer device * **						
* Specify quantity ** Remote only.					* Other lengths available; please consult factory.		Please specify

How to Specify Standard Rings

Note: The center line indicates the diameter at the center of the curve. Regardless to the mounting style, the center line remains the same. This is the dimension that should be used when planning a layout.

Defining Rings - Circular shape

SK3RS-D(36")-AL(9' 5 3/32")-500-90-35-SO-W-120-DP-1-DF

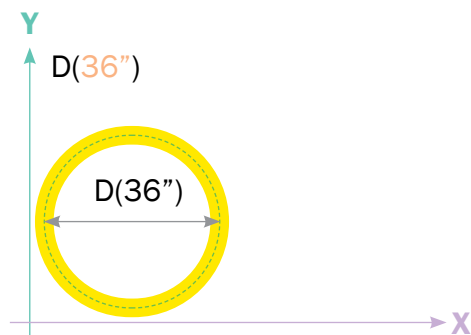

Note: The number will define the diameter of the circle.

CONSTRUCTION


Housing	Extruded aluminum (0.075" nominal)
Interior reflectors	Sheet aluminum (20 gauge)
Mounting brkts.	Die cast aluminum (0.10" nominal)
Joining brackets.	Die cast aluminum (0.10" nominal)
Incap & Cross Brkt.	Die cast aluminum (0.10" nominal)

SHEILDING

Spotless Lens	Acrylic (0.06" thick).
----------------------	------------------------

IP54 SYSTEM

System runs are comprised of a combination of sections to be assembled on site using our joining system which includes a clear silicone gasket for almost seamless construction for IP54 rating.



FINISH

Highly reflective, white powder coat finish paint for high efficiency. Matte texture to diffuse glare and lamp image on the surface within the optical chamber exterior. Custom finishes are also available.

ELECTRICAL

DP driver	integral DP driver. 0-10V 1% dimming standard.
DALI2 driver	integral DALI driver. DALI 2.0 D4i certified driver.
Lutron driver* (Remote)	LDE1 - EcoSystem H-Series (1%)
Other drivers* (Remote)	DMX - Digital Multiplex Xitanium SR - For wireless sensor *Consult factory
Tunable White TW drivers*	DALIDT6 - DALI Type 6 (Two DALI Addresses) DALIDT8 - DALI Type 8 (One DALI Address) DPTW - two channel 0-10V dimming; one channel for brightness, one channel for CCT. LDTW - Lutron DALI Type 8 (One DALI address) Tunable White series
Power over Ethernet POE drivers* (consult factory for more information) UL2108 certified for remote driver	MOLEX IGOR SMARTENGINE O - Other (Consult factory)
Emergency*	Remote emergency battery pack or emergency circuit optional. *Consult factory
Input Voltage	120V, 277V, 347V, UNV, DC.

i Incorporating these components may have limitations or effect the length of the luminaire, please contact factory for more details.

LED SYSTEM

CRI	High efficacy 90 color rendering index.
CCT Single Color	Choice of 2700K, 3000K, 3500K and 4000K color temperature with a great color consistency (within 3-step MacAdam ellipse). Both within fixture and fixture to fixture.
LED life	Minimum 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements.
CCT Axitune Systems	Consult Axitune technical sheet for more information on color technology.
Thermal Management	Aluminum housing acting as the heat sink to maximize life.
Environment	Outdoor under canopy, indoor healthcare and wipe down IP54 rated

WEIGHT

Approximately 1.75lbs/ft = 0.8kg/ft (linear)

APPROVALS

Certified to CSA standards 
Meets NYC requirements
Suitable for outdoor under canopy, indoor healthcare and wipe down IP54 rated. .

WARRANTY


Axis Lighting will warrant defective LEDs, boards, and drivers for 5 years from date of purchase. Warranty is valid if luminaire is installed and used according to specifications. If defective, Axis will send replacement boards or drivers at no cost along with detailed replacement instructions and instructions on how to return defective components to Axis.

● PHOTOMETRIC DATA

SO Spotless lens - Down

Downlight
1300 lm/ft

PHOTOMETRIC CURVE

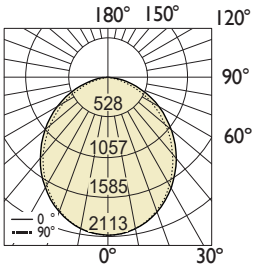

Total Lumens: 5201 lm (for 4ft)
Input Watts: 44.71 W
Efficacy: 116 lm/W
IES FILE: SK3R-FF-4-1300-90-35-SO-Preliminary.ies
TESTED ACCORDING TO IES LM-79-2019

CANDELA DISTRIBUTION					
Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	2113	2113	2113	2113	2113
5	2100	2099	2100	2101	2102
15	2004	2001	2001	1996	1996
25	1822	1814	1810	1795	1792
35	1569	1563	1545	1519	1510
45	1276	1264	1240	1201	1191
55	959	946	912	863	849
65	639	620	580	529	513
75	327	306	263	222	208
85	82	61	39	27	25
90	6	6	5	5	5

ZONAL LUMENS	
Zone	Lumens
0	
0-10	199
10-20	562
20-30	829
30-40	960
40-50	946
50-60	805
60-70	564
70-80	279
80-90	57
90	

LUMINANCE DATA (cd/m²)			
Vertical Angle	Horizontal Angles		
	0	45	90
45	22061	21440	20591
55	20437	19435	18094
65	18498	16770	14836
75	15452	12423	9820
85	11548	5459	3453

i All IES files are available for download at: www.axislighting.com