


Sketch 4

RING RECESSED IP54 - RGB+W

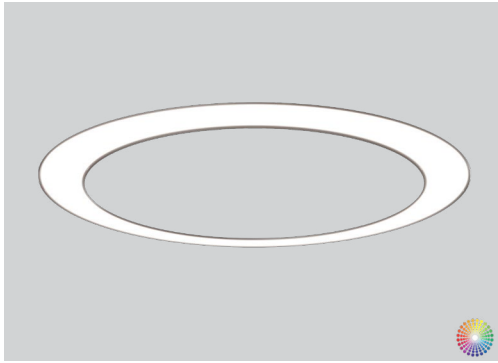

Project _____


Type _____

Notes _____


● PERFORMANCE PER LINEAR FOOT AT 3500K WHITE

	NOMINAL LUMEN OUTPUT DIRECT	INPUT WATTS*	EFFICACY
Sketch 4	1000lm/ft	13.11 W/ft	75.5 lm/W

Please consult factory for other lumen output and wattage.



DF drywall flange shown



DS drywall spackle flange shown



Ordering Guide

SK4RS					
PRODUCT ID		PATTERNS AND FORMS		CORRESPONDING TOTAL LENGTH	
SK4RS	Sketch 4 Ring Recessed RGB+W Sealed - IP54 rated	D(36")	diameter 36"	AL(9' 5 2/16")	1000
		D(48")	diameter 48"	AL(13' 6 13/16")	
		D(60")	diameter 60"	AL(16' 8 8/16")	
		D(72")	diameter 72"	AL(19' 10 3/16")	
		D(84")	diameter 84"	AL(22' 11 14/16")	
		D(96")	diameter 96"	AL(25' 1 9/16")	
See above for available diameter options. See page 2 for ordering examples.				1000 lm/ft	

CRI	COLOUR TEMP.		SHIELDING	FINISH		VOLTAGE	DRIVER	
90	high efficacy 90 CRI	CTRGBW30 RGB+30K White - Color Tuning CTRGBW35 RGB+35K White - Color Tuning CTRGBW40 RGB+40K White - Color Tuning	SO spotless lens	AP aluminum paint W white BLK black C custom		120 120V 277 277V UNV universal	CT(DMX)	color tuning driver


CIRCUITS		MOUNTING		OTHER (OPT.)		CUSTOM (OPT.)
1 +E(#)	1 circuit emergency circuit *	DF drywall flange DS drywall spackle flange		FW flex whip (6' std)* CP Chicago plenum		C custom
* Specify quantity				* Other lengths available; please consult factory.		Please specify

How to Specify Standard Rings

Note: The center line indicates the diameter at the center of the curve. Regardless to the mounting style, the center line remains the same. This is the dimension that should be used when planning a layout.

Defining Rings - Circular shape

SK4RS-D(36")-AL(9' 5 3/32")-700-90-CTRGBW35-SO-W-120-CT(DMX)-1-DF

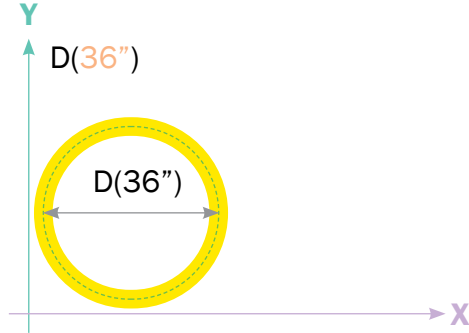

Note: The number will define the diameter of the circle.

CONSTRUCTION

Housing	Extruded aluminum (0.075" nominal)
Interior reflectors	Sheet aluminum (20 gauge)
Mounting brkts.	Die cast aluminum (0.10" nominal)
Joining brackets.	Die cast aluminum (0.10" nominal)
Incap & Cross Brkt.	Die cast aluminum (0.10" nominal)

SHEILDING

Spotless Lens	Acrylic (0.06" thick).
----------------------	------------------------

FINISH

Highly reflective, white powder coat finish paint for high efficiency. Matte texture to diffuse glare and lamp image on the surface within the optical chamber exterior. Custom finishes are also available.

WEIGHT

Approximately 1.75lbs/ft = 0.8kg/ft (linear)

DMX CONNECTION

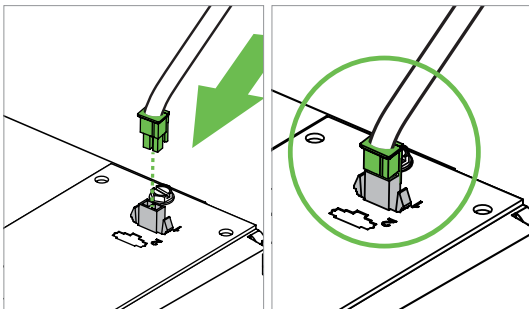


Illustration shows DMX cables that run to luminaire using MOLEX® Quick Connect plug for easy wiring.

Appropriate cables include (but are not limited to) the following:


PLENUM RATED	NON-PLENUM RATED
Belden 82842	Belden 9842
Belden 89842	Liberty 24-2P-485
Liberty 24-1P-P485	
Liberty 24-2P-P485	

The maximum recommended run length between a single fixture and the DMX controller or splitter where the signal originates (or is boosted in the case of a splitter) is 1000 ft including any cable length between a ceiling canopy and the fixture.

The maximum recommended bus run length between two daisy-chained DMX controlled fixtures is 300 ft.

IP54 SYSTEM

System runs are comprised of a combination of sections to be assembled on site using our joining system which includes a clear silicone gasket for almost seamless construction for IP54 rating.



ELECTRICAL

Color Tuning CT driver	DMX - Standard
Emergency	Emergency circuit optional.
Input Voltage	120V, 277V, UNV.

i Incorporating these components may have limitations or affect the length of the luminaire. Please contact factory for more details.

LED SYSTEM

CRI	High efficacy 90 color rendering index.
CRI Color Tuning	90 CRI for CTRGBW. Note: RGB+W allows you to select the 'white point' (CCT) + CRI, delivering a more flexible and powerful white than standard RGBW.
CCT Color Tuning	30 (3000K) 35 (3500K) 40 (4000K)
CCT Axitune Systems	Consult Axitune technical sheet for more information on color technology.
LED life	Minimum 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements.
Thermal Management	Aluminum housing acting as the heat sink to maximize life.
Environment	Outdoor under canopy, indoor healthcare and wipe down IP54 rated

APPROVALS

Certified to CSA standards 
Meets NYC requirements
Suitable for outdoor under canopy, indoor healthcare and wipe down IP54 rated.

WARRANTY

Axis Lighting will warrant defective LEDs, boards, and drivers for 5 years from date of purchase. Warranty is valid if luminaire is installed and used according to specifications. If defective, Axis will send replacement boards or drivers at no cost along with detailed replacement instructions and instructions on how to return defective components to Axis.

DMX INSTALLATION EXAMPLE



DMX OUT

L1

Bus length for daisy chain =
length L1 + length L2 +
length L3 etc.

L2

Fixtures with DMX IN and
DMX OUT ports may be daisy
chained

L3

T Terminator should be
installed at the end of every
bus

DMX IN

DMX Fixture

DMX OUT

DMX IN

DMX Fixture

DMX OUT

DMX IN

DMX Fixture



● WHAT IS DMX512 AND RDM

DMX512A (Digital Multiplex 512) is a communication standard (based on EIA-485/RS-485) for digital communication networks, typically used in stage lighting and control, but also in other various lighting applications.

DMX drivers are installed in DMX-enabled luminaires and programmed to specific DMX addresses to properly zone and control your fixtures.

RDM (Remote Device Management) is a protocol enhancement to DMX512, which allows a commissioner to remotely program multiple or individual DMX decoders to a unique DMX address. This is performed by simply connecting an RDM controller to the first DMX driver in a series run.

All DMX drivers/decoders Axis is using are RDM-compatible.


● DMX GLOSSARY

- **DMX Signal:** a repeating chain data output by a DMX controller, comprised of one 8-bit start code packet followed by 512 8-bit data packets. The first data packet is slot 1, the second slot 2, etc. The entire chain is repeated 44 times per second.
- **Device:** a DMX controller, a DMX-controlled fixture, or a DMX splitter DMX controller: a device where the DMX signal originates (sometimes called a "console")
- **DMX splitter:** a device that receives a DMX signal on its input, then duplicates that signal on its output(s). The input and output signals are usually isolated from each other, and the signal is "boosted" back to full voltage at each output (thereby compensating for voltage drop in long wiring runs). DMX splitters must be powered by their own mains or low-voltage supply.
- **DMX Fixture:** a light fixture that contains a DMX decoder that receives a DMX signal and changes its behavior based on those commands. Fixtures may be equipped with both "input" and "output" connections for the DMX signal.
- **DMX network:** ALL devices, cabling, and interconnections in a DMX controlled lighting system including the controller, fixtures, and splitters (if used)
- **Bus:** a continuous run of daisy-chained devices, originating at the output of a DMX controller or DMX splitter. No more than 32 devices should be connected to a single bus per the DMX-512A standard.
- **Terminator:** a 120Ω resistance installed at the end of a DMX bus to eliminate signal reflection back into the network
- **Channel:** a DMX-controlled element within a DMX fixture. For example an RGB fixture has three channels: one each for red, green, and blue.
- **Address:** the number of the first channel that a DMX fixture reads from the DMX signal

● PHOTOMETRIC DATA

SO Spotless lens - Down

Downlight
1000 lm/ft



Total Lumens: 3958 lm (for 4ft)
Input Watts: 52.42 W
Efficacy: 75.5 lm/W

IES FILE: SK4xx-LIN(4)-AL(4)-1000-90-CTRGBW35-SO.ies

TESTED ACCORDING TO IES LM-79-2019

CANDELA DISTRIBUTION					
Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	1566	1566	1566	1566	1566
5	1555	1554	1555	1556	1558
15	1485	1483	1483	1482	1483
25	1351	1347	1346	1341	1342
35	1170	1164	1158	1146	1146
45	955	946	935	920	916
55	722	711	696	676	672
65	483	469	453	430	425
75	254	236	216	194	189
85	60	45	30	20	18
90	4	4	4	4	3

ZONAL LUMENS	
Zone	Lumens
0	
0-10	148
10-20	418
20-30	620
30-40	724
40-50	723
50-60	625
60-70	453
70-80	238
80-90	51
90	

LUMINANCE DATA (cd/m²)			
Vertical Angle	Horizontal Angles		
	0	45	90
45	12022	11772	11534
55	11207	10806	10439
65	10182	9539	8946
75	8729	7449	6519
85	6128	3111	1836

i All IES files are available for download at: www.axislighting.com