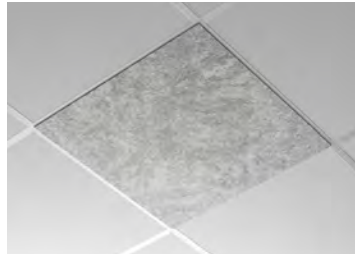


Concaved felt shape, below t-bar shown




Flat felt shape, below t-bar shown



Project _____

Type _____

Notes _____



Concaved felt shape, below t-bar shown.

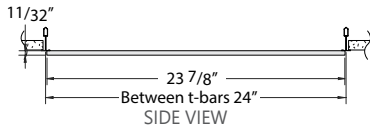

Flat felt shape, below t-bar shown.

Ordering Guide

| PRODUCT ID | SIZE | FELT SHAPE | ACOUSTIC PANEL FINISH | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------|-------------|------------|------------------------|------------------------------|------------|--------------|--------------------------|--|--------------|--------------|-------------|--------------|--------------|-------------|---------------|---------------|--------------|--------------|-------------|---------------|--------------|--------------------|--------------|----------------|---------------|---------------|--------------|--------------------|----------------|-------------|-------------|-------------|------------|-----------------|-------------------|----------------|---------------|--------------|----------------|---------------|-------------------|---------------|---------------------|
| | | | STANDARD PALETTE | | | | EXTENDED CUSTOM PALETTE* | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TACETBL | Tacet Unlit | 22 2'X2' | CC concaved FL flat | COT cotton | MAR marble | CON concrete | SAN sand | CUSPUR purple | CUSOCE ocean | CUSLEM lemon | CUSLIM lime | CUSBRI brick | CUSEAR earth | CUSCOR cork | CUSCOP copper | CUSCAR carbon | CUSFRO frost | CUSDEN denim | CUSNAV navy | CUSPEB pebble | CUSSMO smoke | CUSAPP apple green | CUSOLI olive | CUSEME emerald | CUSANC anchor | CUSSHA shadow | CUSWHE wheat | CUSSAC sand castle | CUSLEA leather | CUSPER peru | CUSMOS moss | CUSBAR bark | CUSTIN tin | CUSMOC moccasin | CUSGIN ginger ale | CUSASP asphalt | CUSFOS fossil | CUSSLA slate | CUSCRI crimson | CUSMAN maroon | CUSFIR fire brick | CUSIND indigo | CUSBUR burnt orange |
| | | | | See page 3 for more details. | | | | * Extended custom color palette panels available per request. Consult factory for details. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| PANEL POSITION | MOUNTING | CUSTOM (OPT.) |
|--|----------------------|----------------|
| AT Above t-bar* | TB9 t-bar 9/16" | C custom |
| BT Below t-bar | TB15 t-bar 15/16" | |
| | ST screw slot t-bar* | |
| | TG9 tegular 9/16" | |
| | TG15 tegular 15/16" | |
| *Not available for ST screw slot t-bar | | Please specify |


● SPECIFICATIONS

| | |
|---------------------------------|--|
| Housing | Die formed cold rolled sheet steel (22 gauge) |
| Panel | Thermoformed PET felt |
| Corner spring brackets | Die formed cold rolled sheet galvanised steel (16 gauge) |
| Corner mounting brackets | Die formed cold rolled sheet galvanised steel (20 gauge) |
| Torsion spring | Spring steel |

● WEIGHT

| | |
|---------------------|--------------------|
| Concaved 2x2 | 1.44 lbs / 0.65 kg |
| Flat 2x2 | 1.44 lbs / 0.65 kg |

● APPROVALS

Certified to UL and CSA standards. 
 Chicago Plenum Certified (CCEA)
 Meets NYC requirements
 Suitable for damp locations.
 IC Rated (Insulated ceiling)



ACOUSTIC FELT FIRE SAFETY:

Class A Fire Rated as per ASTM E84.
 Flame Spread Index: 5
 Smoke Development Index: 110

● ACOUSTIC FELT CLEANING PROTOCOL



NOTE: Easy to clean. Made from polyester fill with natural anti-microbial properties.



Periodic dusting with vacuum or dry cloth recommended.



For stain removal, use a small amount of soap or detergent on a wet cloth.



For added disinfection, use bleach solution (5 tablespoons per Gallon of water), spray onto surface and gently wipe to spread all over.

● ACOUSTIC PANEL WARRANTY

All Acoustic panels are guaranteed for 1 year (warranty period) from date of shipment from our factory. Defective products will be repaired or replaced at the discretion of Axis Lighting provided a written claim is made within the warranty period.

Exclusions of Warranty:










- Normal wear and tear (scratches, direct sunlight, etc.).
- Products that have been modified, improperly installed, used in conditions or for purposes other than which they were intended.

● WARRANTY

Limited 5-year warranty is available. Warranty is valid provided luminaires are installed and used according to specifications. For full terms and conditions, please consult warranty section at axislighting.com.


● CEILING SYSTEM

T-BAR MOUNTING

| | (TB9) 9/16" T-BAR | (TB15) 15/16" T-BAR | (TG9) 9/16" TEGULAR | (TG15) 15/16" TEGULAR | (ST) SCREW SLOT |
|--------------------|---|---|---|--|---|
| ABOVE T-BAR |  |  |  |  | N/A |
| BELOW T-BAR |  |  |  |  |  |

i Installation sheets for all mounting options are available at: www.axislighting.com

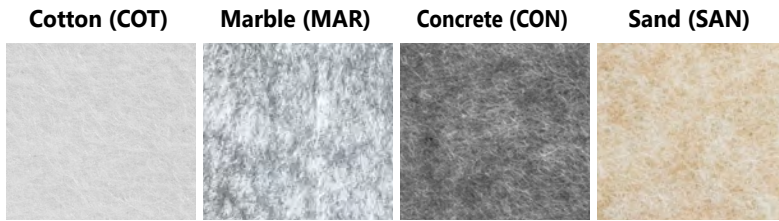ACOUSTIC FELT STANDARD COLOR PALETTE



EXTENDED ACOUSTIC FELT COLOR PALETTE

Available per request. Consult factory for details.

