




Project \_\_\_\_\_

Type \_\_\_\_\_

Notes \_\_\_\_\_



Below t-bar shown



SIDE VIEW

Below t-bar shown.

## Ordering Guide

PRODUCT ID	SIZE	FELT SHAPE	ACOUSTIC PANEL FINISH																																								
			STANDARD PALETTE			EXTENDED CUSTOM PALETTE*																																					
TACETBL	Tacet Unlit	24 2'X4'	FL flat	COT cotton	MAR marble	CON concrete	SAN sand	CUSPUR purple	CUSOCE ocean	CUSLEM lemon	CUSLIM lime	CUSBRI brick	CUSEAR earth	CUSCOR cork	CUSCOP copper	CUSCAR carbon	CUSFRO frost	CUSDEN denim	CUSNAV navy	CUSPEB pebble	CUSSMO smoke	CUSAPP apple green	CUSOLI olive	CUSEME emerald	CUSANC anchor	CUSSHA shadow	CUSWHE wheat	CUSSAC sand castle	CUSLEA leather	CUSPER peru	CUSMOS moss	CUSBAR bark	CUSTIN tin	CUSMOC moccasin	CUSGIN ginger ale	CUSASP asphalt	CUSFOS fossil	CUSSLA slate	CUSCRI crimson	CUSMAN maroon	CUSFIR fire brick	CUSIND indigo	CUSBUR burnt orange
				See page 3 for more details.			* Extended custom color palette panels available per request. Consult factory for details.																																				

PANEL POSITION		MOUNTING		CUSTOM (OPT.)
AT	Above t-bar*	TB9	t-bar 9/16"	C custom
BT	Below t-bar	TB15	t-bar 15/16"	
		ST	screw slot t-bar*	
		TG9	tegular 9/16"	
		TG15	tegular 15/16"	
*Not available for ST screw slot t-bar				Please specify


### ● SPECIFICATIONS

<b>Housing</b>	Die formed cold rolled sheet steel (22 gauge)
<b>Panel</b>	Thermoformed PET felt
<b>Corner spring brackets</b>	Die formed cold rolled sheet galvanised steel (16 gauge)
<b>Corner mounting brackets</b>	Die formed cold rolled sheet galvanised steel (20 gauge)
<b>Torsion spring</b>	Spring steel

### ● WEIGHT

<b>Flat 2x4</b>	2.88 lbs / 1.30 kg
-----------------	--------------------

### ● APPROVALS

Certified to UL and CSA standards.   
 Chicago Plenum Certified (CCEA)  
 Meets NYC requirements  
 Suitable for damp locations.  
 IC Rated (Insulated ceiling)



#### ACOUSTIC FELT FIRE SAFETY:

Class A Fire Rated as per ASTM E84.  
 Flame Spread Index: 5  
 Smoke Development Index: 110

### ● ACOUSTIC FELT CLEANING PROTOCOL



**NOTE:** Easy to clean. Made from polyester fill with natural anti-microbial properties.



Periodic dusting with vacuum or dry cloth recommended.



For stain removal, use a small amount of soap or detergent on a wet cloth.



For added disinfection, use bleach solution (5 tablespoons per Gallon of water), spray onto surface and gently wipe to spread all over.

### ● ACOUSTIC PANEL WARRANTY

All Acoustic panels are guaranteed for 1 year (warranty period) from date of shipment from our factory. Defective products will be repaired or replaced at the discretion of Axis Lighting provided a written claim is made within the warranty period.

#### Exclusions of Warranty:










- Normal wear and tear (scratches, direct sunlight, etc.).
- Products that have been modified, improperly installed, used in conditions or for purposes other than which they were intended.

### ● WARRANTY

Limited 5-year warranty is available. Warranty is valid provided luminaires are installed and used according to specifications. For full terms and conditions, please consult warranty section at [axislighting.com](http://axislighting.com).


### ● CEILING SYSTEM

#### T-BAR MOUNTING

	(TB9) 9/16" T-BAR	(TB15) 15/16" T-BAR	(TG9) 9/16" TEGULAR	(TG15) 15/16" TEGULAR	(ST) SCREW SLOT
<b>ABOVE T-BAR</b>					N/A
<b>BELOW T-BAR</b>					

**i** Installation sheets for all mounting options are available at: [www.axislighting.com](http://www.axislighting.com)

## ACOUSTIC FELT STANDARD COLOR PALETTE

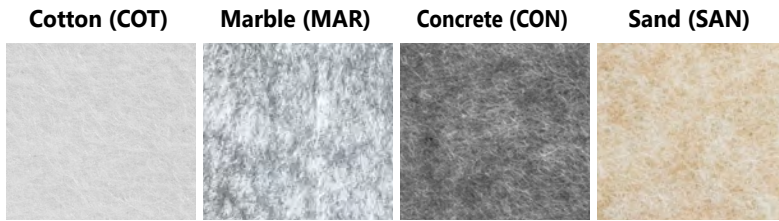

## EXTENDED ACOUSTIC FELT COLOR PALETTE

Available per request. Consult factory for details.

