
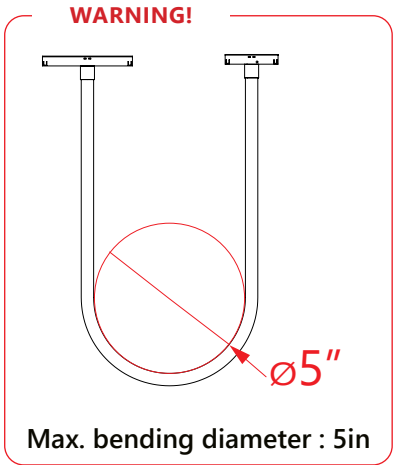


Project _____
Type _____
Notes _____

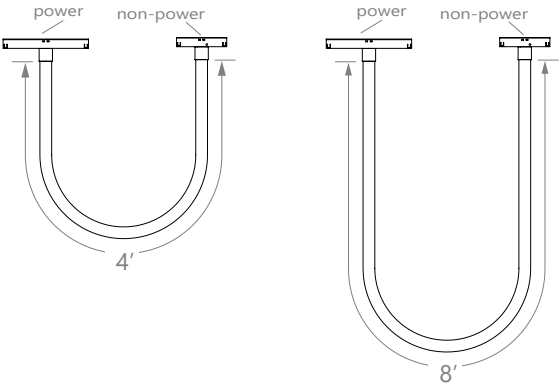

Ordering Guide

TDFT360																			
PRODUCT ID		MODULE SIZE		TOTAL LUMENS/FT		CRI		COLOR TEMP.		HOUSING FINISH		MOUNTING		CONTROLS		MOUNTING FINISH			
TDFT360	Track Decorative Flexible 360° Tube 7/8" diameter	4	4ft	300	300 lm/ft	90	90 CRI	27	2700 K	BLK	black	AXT	Axistrak	DP	integral driver 0-10V dimming (1%)	BLK	black		
		8	8ft					30	3000 K									W	white
								35	3500 K										
		Lengths between 4ft and 8ft are available, please consult factory.																	

CONSTRUCTION

Optics	Flexible Silicon
End caps	Painted die-cast aluminum

ELECTRICAL

DP	Integral 0-10v 1% dimming low voltage driver (48V)
DALIDT6	Integral Dali 2.0 D4i type 6 low voltage driver (48V)

i Incorporating these components may have limitations or affect the length of the luminaire, please contact factory for more details.

LED SYSTEM

CRI	Minimum 90 color rendering index
CCT	Choice of 2700K, 3000K, 3500K color temperature with a great color consistency (within 3-step MacAdam ellipse).
LED life	Minimum 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements.


FINISH

Powder coated black, white, and custom finishes are available.

WEIGHT

Estimated insert weight per linear foot 0.375 lbs/ft

APPROVALS

Certified to cULus standards. 
Certified under UL1598.

WARRANTY

Limited 5-year warranty is available. Warranty is valid provided luminaires are installed and used according to specifications. For full terms and conditions, please consult warranty section at axislighting.com.