



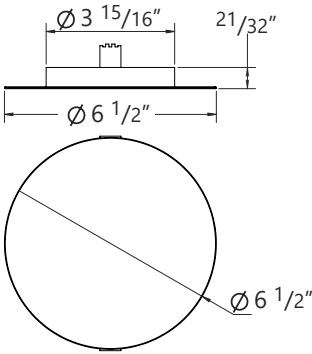

Project _____

Type _____

Notes _____

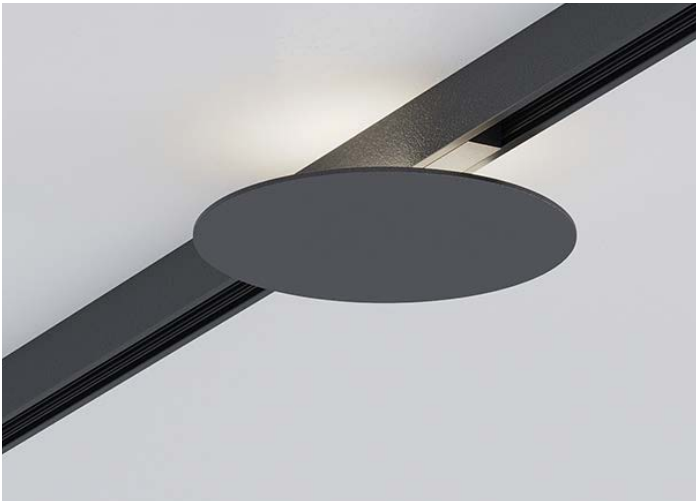

Ordering Guide

TDRI															
PRODUCT ID		SIZE		TOTAL LUMENS		CRI		COLOR TEMP.		HOUSING FINISH		MOUNTING		CONTROLS	
TDRI	Track Decorative Round Indirect Disk	6.5	6.5 in	1000	1000 lm	90	90 CRI	27	2700 K	BLK	black	AXT	Axistrak	DP	integral driver 0-10V
								30	3000 K	W	white				dimming (1%)
								35	3500 K	C(#)	custom*				integral driver DALI 2.0
										See custom finishes guide https://www.axislighting.com/finishes				Type 6	

ADAPTOR FINISH	
BLK	black
W	white

● CONSTRUCTION

Housing	Cast aluminum
Lens	Molded acrylic

● LED SYSTEM

CRI	Minimum 90 color rendering index
CCT	2700K, 3000K, 3500K color temperature with a great color consistency (within 3-step MacAdam ellipse).
LED life	Minimum 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements.
Thermal Management	Aluminum housing acting as the heat sink to maximize life.

● ELECTRICAL

DP	Integral 0-10v 1% dimming low voltage driver (48V)
DALIDT6	Integral Dali 2.0 D4i type 6 low voltage driver (48V)

i Incorporating these components may have limitations or affect the length of the luminaire, please contact factory for more details.

● FINISH

Powder coated matte black and white finishes available.

● APPROVALS

Certified to cULus standards.



All Decoratives, Pendants, and Spotlights certified under UL2108.


● WARRANTY

Limited 5-year warranty is available. Warranty is valid provided luminaires are installed and used according to specifications. For full terms and conditions, please consult warranty section at axislighting.com.

PHOTOMETRIC DATA - INDIRECT

1000 lm

PHOTOMETRIC CURVE

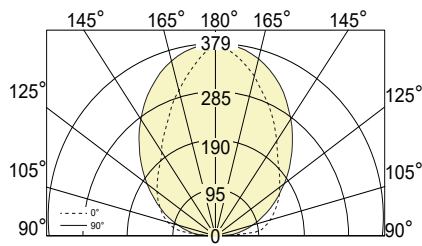

Indirect Output: 982 lm
Total Lumens: 982 lm
Input Watts: 18 W
Efficacy: 54 lm/W

90 CRI shown.
IES FILE: A25144G (1).ies
TESTED ACCORDING TO IES LM-79-2019

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles								
	0	22.5	45	67.5	90	112.5	135	157.5	180
90	3	47	62	72	13	71	61	47	3
95	39	55	77	90	87	88	75	54	35
105	86	79	103	118	124	117	101	77	81
115	133	113	127	143	148	142	124	109	127
125	183	161	155	167	171	164	151	154	176
135	235	212	197	193	195	190	190	203	227
145	284	265	247	237	233	232	238	253	277
155	330	316	295	284	280	280	285	301	323
165	362	355	342	332	327	327	332	342	358
175	378	378	374	369	367	365	366	369	377
180	375	375	375	375	375	375	375	375	375

ZONAL LUMENS

Lumens	
Zone	
90	
90-100	68
100-110	100
110-120	122
120-130	139
130-140	148
140-150	148
150-160	131
160-170	93
170-180	34
180	

All IES files are available for download at: www.axislighting.com